


LDK[®] Corrosion Resistant Bearing Inserts

SUE Standard duty, Stainless steel, Wider inner ring, Concentric locking, Factory-Lubed with food grade grease and with silicon rubber seal.

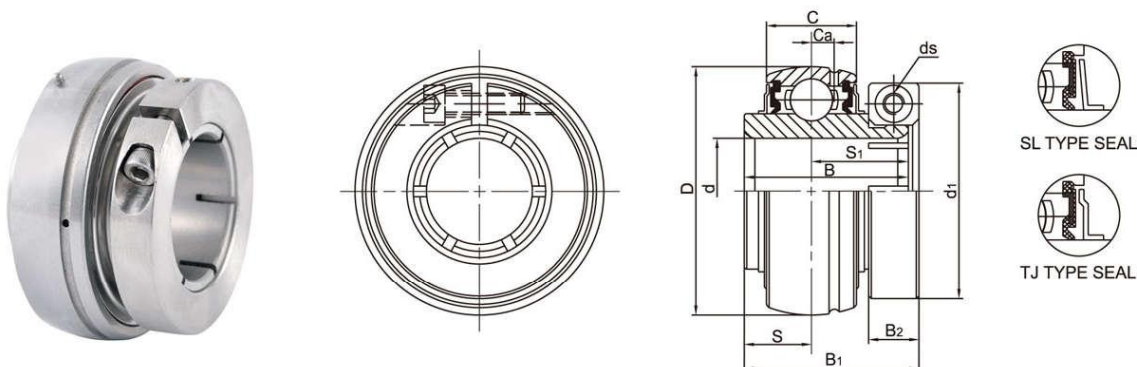

Bearing No.	Shaft Dia		Dimensions (mm)										Load rating (KN)		Weight (kg)
	d		D	B	C	S	S1	B1	B2	d1	ds	Ca	Dynamic Cr	Static Cor	
SUE204		20													
204-12	3/4		47	31	17	12.7	18.3	33.0	9.5	40.8	M4x0.7	4.3	12.88	6.65	0.18
SUE205		25													
205-13	13/16		52	34.1	17	14.3	19.8	35.4	9.5	49.0	M4x0.7	4	14.03	8.05	0.21
205-14	7/8														
205-15	15/16														
205-16	1														
SUE206		30													
206-17	1-1/16		62	38.1	19	15.9	22.2	39.8	9.5	55.5	M4x0.7	5.3	19.47	11.43	0.33
206-18	1-1/8														
206-19	1-3/16														
206-20	1-1/4														
SUE207		35													
207-20	1-1/4		72	42.9	20	17.5	25.4	43.9	11.0	64.0	M5x0.8	5.8	25.69	15.55	0.51
207-21	1-5/16														
207-22	1-3/8														
207-23	1-7/16														
SUE208		40													
208-24	1-1/2		80	49.2	21	19.0	30.2	50.2	11.0	68.0	M5x0.8	6.2	29.51	18.14	0.68
208-25	1-9/16														
SUE209		45													
209-26	1-5/8		85	49.2	22	19.0	30.2	50.2	11.0	74.0	M5x0.8	6.5	31.85	20.80	0.78
209-27	1-11/16														
209-28	1-3/4														
SUE210		50													
210-30	1-7/8		90	51.6	24	19.0	32.6	52.6	14.5	81.0	M6x1	7	34.99	23.70	0.85
210-31	1-15/16														
210-32	2														
SUE211		55													
211-32	2		100	55.6	25	22.2	33.4	56.6	14.5	92.0	M6x1	7.4	43.34	29.39	1.16
211-33	2-1/16														
211-34	2-1/8														
211-35	2-3/16														
SUE212		60													
212-36	2-1/4		110	65.1	27	25.4	39.7	66.6	17.5	103.0	M8x1.25	7.6	47.68	33.43	1.59
212-37	2-5/16														
212-38	2-3/8														
212-39	2-7/16														